


Technical Specifications
48/144F Multitube Unarmoured OFC
AI-DQ(ZN)BH-MT

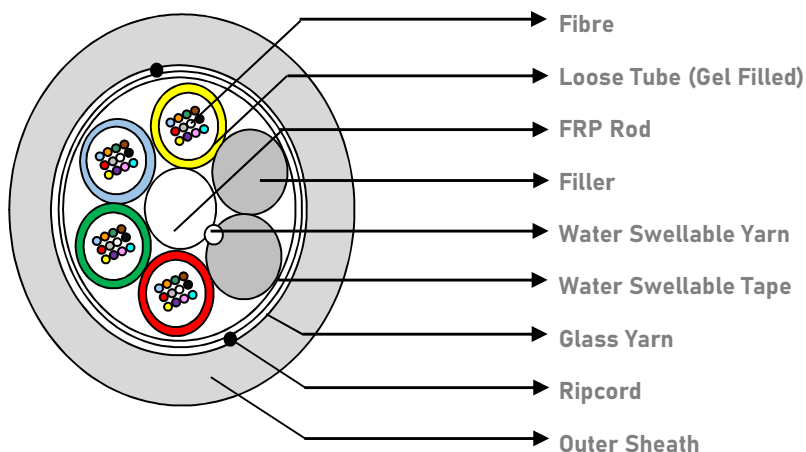

**Product
Details**

Optical Fibre containing elements laid up around central strength member
Water blocked loose tubes
Water blocked core interstices
Glass yarn as peripheral strength member
LSZH sheath as outer protection

Cable Construction

Parameter	Structure/Layout/Material	
Fiber Count	48	144F
Number of fibers per tube	12	
Number of loose tubes - PBT	4	12
Number of fillers - HDPE - Black	2	0
Central Strength Member - FRP Rod	2.3 ± 0.1 mm	3.5 mm PE upcoated
Moisture Barrier	Water Swellable yarn & Water Swellable tape	
Peripheral Strength Member	Glass Yarn	
Outer Sheath - LSZH - Black	---	
Number of Ripcords - Polyester	2	
Cable Diameter	11.0 ± 0.5 mm	15.5 ± 1.0 mm
Cable Weight	125 ± 10 kg/km	225 ± 20 kg/km
Tensile Strength	3000 N	5500 N

Colour Coding

Fibre Colour DIN VDE 0888	Rd	Gr	Bl	Yl	Wh	Sl	Br	Vi	Aq	Bk	Or	Pk
------------------------------	----	----	----	----	----	----	----	----	----	----	----	----

Fibre Colour DIN VDE 0888	Rd	Gr	Bl	Yl	Wh	Sl	Br	Vi	Aq	Bk	Or	Pk
------------------------------	----	----	----	----	----	----	----	----	----	----	----	----

Cable & Fibre Characteristics

Tensile Strength	48F : 3000 N 144F : 5500 N		IEC-60794-1-21-E1
Crush Resistance	1000 N		IEC-60794-1-21-E3
Impact Strength	10 N.m		IEC-60794-1-21-E4
Torsion	± 360 °		IEC-60794-1-21-E7
Minimum Bend Radius	20 x D		IEC-60794-1-21-E11
Water Penetration Test	1 m water head, 3m sample, 24 hours		IEC-60794-1-22-F5
Environmental Performance	Installation	-20 °C to + 70 °C	IEC-60794-1-22-F5
	Operation	-30 °C to + 70 °C	
	Storage	-30 °C to + 70 °C	

Fiber Type	G.652D	
Attenuation	1310 nm	≤ 0.36 dB/km
	1550 nm	≤ 0.23 dB/km
Chromatic Dispersion	1285-1330 nm	≤ 3.5 ps/nm.km
	1550 nm	≤ 18 ps/nm.km
PMD	≤ 0.2 ps/√km	
Cable cut off wavelength λ_{cc}	≤ 1260 nm	
MFD	1310 nm	9.2 ± 0.4 μm
	1550 nm	10.4 ± 0.5 μm
Core-Cladding Concentricity Error	≤ 0.5 μm	
Cladding Diameter	125 ± 0.7 μm	
Cladding Non Circularity	≤ 0.7 %	
Primary Coating Diameter (Uncoloured)	242 ± 5 μm	

Cable Marking

HFCL Ltd, 48/144F SM G.652D DUCT *Year of manufacture, Length Code, Meter Marking*

Cable Length

4.0 km ± 5 %

Packaging

Wooden drums or reels

Cable end sealed

Drum marking: Drum number, User name, HFCL Limited, Fiber count, Cable Length, Date of manufacture, Net weight, Gross weight

Cable Performance Standards

IEC 60793, ANSI/ICEA S-87-640, Telcordia GR-20, ITU-T, RoHS, REACH.