

Data sheet

OpDAT 4 AP 2xLC-D MM (ceramic) pure white

P/N

1501127302-E


EAN 4250184111603

2018-30-01

Illustrations



Dimensional drawing

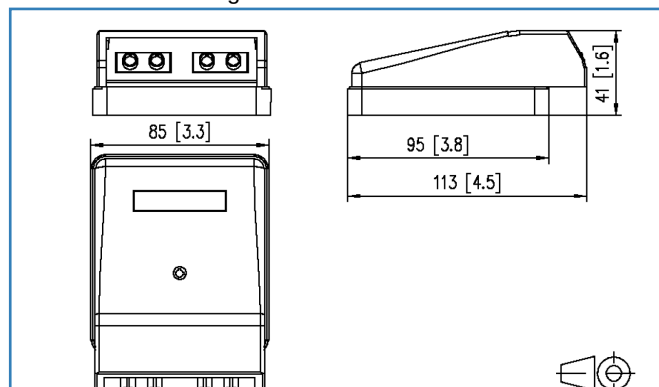

See enlarged drawings at the end of document

Product specification

- fiber optic termination unit for mounting in cable duct / surface mounting with fiber optic adapters
- equipped with 2 LC-D, 2 SC-D or 4 ST adapters
- bending radius of approx. 30 mm is met due to integrated cable reservoir
- plug direction 10° downwards
- strain relief with cable ties possible
- with label window for enclosed identification labels
- suitable for preassembled cables and on-site assembly of plugs
- for mini breakout cables
- cover parts in pure white RAL 9010
- variants: 2 LC-D, 2 SC-D, 4 ST



Technical Data

General Data

Fields of application

Office

Design

Wall outlet

Mounting style

surface mount

Transmission technology

Fiber optic

Color

pure white

Dimensions

Dimension (L x W x H)

41.00 x 85.00 x 113.00 mm

Dimension (L x W x H)

1.614 x 3.346 x 4.449 in.

Mode type of the fiber

Multimode

Fiber construction

50/125 µm

Labeling option

label window with identification label

Connections/interfaces

Connector technology interface 1

LC-D

Connector technology interface 2

LC-D

Number of ports interface 1

2

Number of ports interface 2

2

Number of equipped ports interface 1

2

Number of ports interface 2 equipped

2

Number of ports with dust protection interface 2

2

Module plug-in direction

10° downwards

Mechanical characteristics

Cut-out

SC, LC-D, E2000

Connector type

Duplex

Life - Number of mating cycles

min. 1000

strain relief

cable tie

Materials and material properties

Material - Housing

Plastics

Material - Surface mount frame

ABS

Material - Cover part(s)

ABS

Material - Label window

ABS, transparent

Material - Coupler housing

Plastics



Data sheet

Page 3/4

OpDAT 4 AP 2xLC-D MM (ceramic) pure white

P/N

1501127302-E

EAN 4250184111603

2018-30-01

Technical Data

Materials and material properties

Material - Sleeve ceramic, slotted

Certifications

RoHS compliant

The product meets the following standards

Fibre optic connector interfaces DIN EN 61754-20

Classifications

ETIM 5.0 EC001409

ETIM 6.0 EC001409

Packing details

Type of packaging 1 pc(s) / box

Packaging unit - Weight (gram) 170.00 g

Packaging unit - Weight (pound) 0.37 lb

Packaging dimension (W x H x D) 86.00 x 44.00 x 141.50 mm

Packaging dimension (W x H x D) 3.386 x 1.732 x 5.571 in.



P | Cabling

Data sheet

OpDAT 4 AP 2xLC-D MM (ceramic) pure white

Page 4/4

P/N

1501127302-E

EAN 4250184111603

2018-30-01

Illustrations

Dimensional drawing

