

Data sheet

OpDAT UP 1xLC-D SM APC (ceramic) pure white

Page 1/4

P/N

1501207K1U-E


EAN 4250184180081

2018-31-01

Illustrations



Dimensional drawing

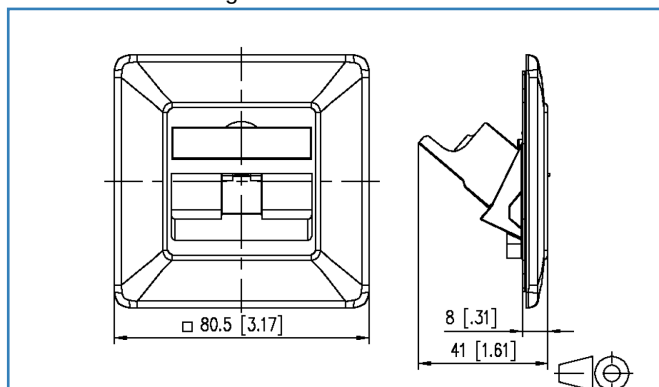

See enlarged drawings at the end of document

Product specification

- flush-mounted termination unit
- equipped with OpDAT modul LC-D SM APC adapter (green) with adapter
- slotted ceramic sleeve
- service life min. 1000 mating cycles
- module plug direction 45° downwards
- strain relief of the Kevlar by screw at the module frame
- velcro tape to bundle the fiber reserve
- with label window for enclosed identification labels
- label sheet 209 x 294 mm see accessory
- integrated dust protection covers (also colored)
- cover parts in pure white RAL 9010, structured surface with matt finish
- compatible with "design" central units of switch lines



Data sheet

Page 2/4

OpDAT UP 1xLC-D SM APC (ceramic) pure white

P/N

1501207K1U-E

EAN 4250184180081

2018-31-01

Technical Data

General Data

Fields of application	Office
Design	Wall outlet
Mounting style	flush mount
Transmission technology	Fiber optic
Color	pure white
Dimensions	
Dimension (L x W x H)	51.00 x 85.60 x 85.60 mm
Dimension (L x W x H)	2.008 x 3.37 x 3.37 in.
Modularity	yes
Mode type of the fiber	Single mode
Labeling option	label window with identification label

Connections/interfaces

Connector technology interface 1	LC-D
Connector technology interface 2	LC-D
Number of ports interface 1	1
Number of ports interface 2	1
Number of equipped ports interface 1	1
Number of ports interface 2 equipped	1
Module plug-in direction	45° downwards

Mechanical characteristics

Cut-out	Modul
Life - Number of mating cycles	min. 1000
Position/mounting of latch - standard installation position	top

Materials and material properties

Material - Surface mount frame	ABS, impact resistant
Material - Cover part(s)	ABS
Material - Supporting frame	GD-Zn (zinc die-cast)
Material - Label window	ABS, transparent
Material - Dust protection	ABS
Material - Coupler housing	Plastics



Technical Data

Materials and material properties

Material - Sleeve	ceramic, slotted
-------------------	------------------

Certifications

RoHS	compliant
------	-----------

Packing details

Type of packaging	1 pc(s) / box
Packaging dimension (W x H x D)	133.00 x 95.00 x 52.00 mm
Packaging dimension (W x H x D)	5.236 x 3.74 x 2.047 in.



P | Cabling

Data sheet

OpDAT UP 1xLC-D SM APC (ceramic) pure white

Page 4/4

P/N

1501207K1U-E

EAN 4250184180081

2018-31-01

Illustrations

Dimensional drawing

