

Data sheet

OpDAT PA patch panel VIK
12xST-S (metal), SM+MM, gray

Page 1/5


P/N
1502200112-E
 EAN 4250184108757

2018-03-01

Illustrations



Dimensional drawing

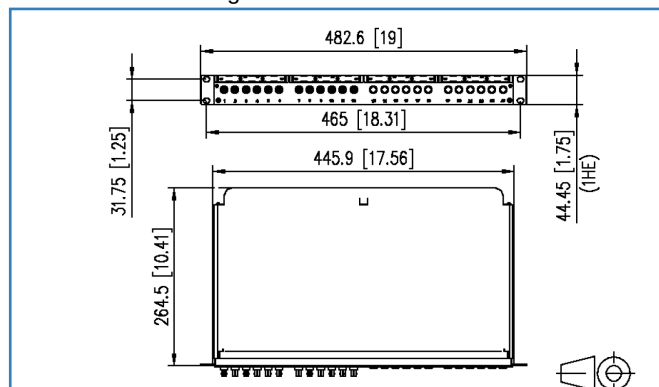

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel with pull-out splice tray / front cover
- equipped with ST adapters
- prepared for fixation of pre-terminated installation cables (OpDAT VIK)
- light aluminum construction
- unused cutouts are closed by blank plugs
- splice tray of withdrawable patch panel tilts and is completely removable to facilitate fitting (end stop)
- variable cable entry (straight / inclined) from both sides possible
- cable arrest with supplied cable tie or optional cable screw gland also possible
- cable diameter from 3 to 20 mm
- strain relief for central element / Kevlar
- cable management by means of freely positionable guide elements
- screwless cover
- label windows for enclosed identification labels
- variants: equipped with 12 or 24 ST adapters each made of metal (SM+MM)



P | Cabling

Data sheet

OpDAT PA patch panel VIK 12xST-S (metal), SM+MM, gray

Page 2/5

P/N
1502200112-E
EAN 4250184108757

2018-03-01

Technical Data

General Data

Fields of application

	Office
	Data center
Design	patch panel
Mounting style	1RU
Transmission technology	Fiber optic
Port numbering	yes
Color	metallike
Dimensions	
Dimension (L x W x H)	264.50 x 482.60 x 44.45 mm
Dimension (L x W x H)	10.413 x 19.00 x 1.75 in.
Inches	19 inches
Height unit	1RU
Installation depth	265.00 mm
Mode type of the fiber	Singlemode + Multimode
Labeling option	label window with identification label + printed numbers

Connections/interfaces

Connector technology interface 1	ST Couplers
Connector technology interface 2	ST Couplers
Number of ports interface 1	24
Number of ports interface 2	24
Number of equipped ports interface 1	12
Number of ports interface 2 equipped	12
Number of ports with dust protection interface 1	12
Number of ports with dust protection interface 2	12
Number of blind covers interface 2	12
Cable access/outlet	variable, straight / inclined, from both sides possible

Mechanical characteristics

Cut-out	ST
Connector type	Simplex
strain relief	cable tie



Data sheet

Page 3/5

OpDAT PA patch panel VIK 12xST-S (metal), SM+MM, gray

P/N

1502200112-E

EAN 4250184108757

2018-03-01

Technical Data

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Sleeve	ceramic, slotted
Material - Coupler housing	metal

Approvals

RoHS	compliant
------	-----------

The product meets the following standards

Fibre optic connector interfaces	DIN EN 61754-2
----------------------------------	----------------

Classifications

ETIM 6.0	EC001130
----------	----------

Packing details

Type of packaging	1 pc(s) / box
Packaging dimension (W x H x D)	523.00 x 361.00 x 45.00 mm
Packaging dimension (W x H x D)	20.591 x 14.213 x 1.772 in.



Data sheet

Page 4/5

OpDAT PA patch panel VIK
12xST-S (metal), SM+MM, gray

P/N
1502200112-E
EAN 4250184108757

2018-03-01

Accessories

P/N	Designation
899789-01	Label sheet for E-DAT C6 and E-DAT design patch panels



P | Cabling

Data sheet

OpDAT PA patch panel VIK 12xST-S (metal), SM+MM, gray

Page 5/5

P/N

1502200112-E

EAN 4250184108757

2018-03-01

Illustrations

Dimensional drawing

