

P | Cabling


Data sheet

OpDAT fix patch panel VIK
24xE2000 APC (green), OS2, gray


Page 1/5

P/N
1502505924-E
EAN 4251394600369
 2021/09/28
 Version: B

Illustrations

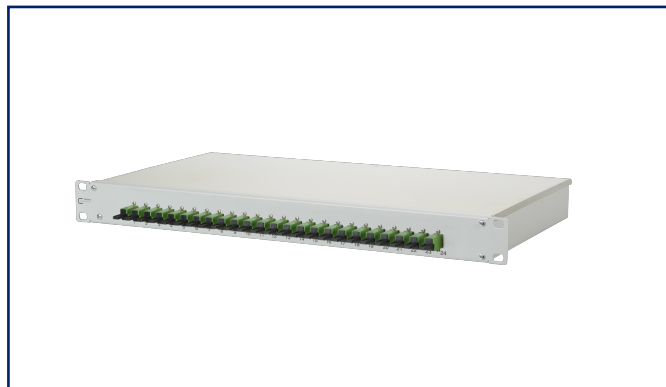

Dimensional drawing

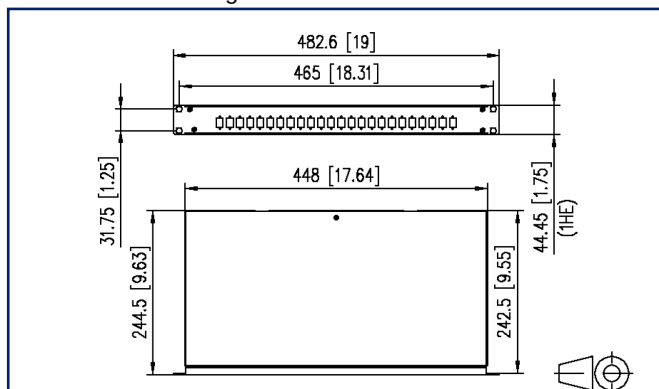

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel for fixed installation
- equipped with E2000 adapters
- prepared for fixation of pre-terminated installation cables (OpDAT VIK)
- light aluminum construction with steel sheet front plate painted (gray or black)
- unoccupied recesses are closed with blind plugs
- removable front plate for easy adapter mounting
- screwed on cover for easy access during service work
- several possibilities for cable entry on the back (fastening with PG13.5, PG16 and PG21 or M20 and M25)
- toolless fastening of pre-assembled installation cables (OpDAT VIK) in a U-shaped cutout
- variants: equipped with 6, 12 or 24 E2000 adapters, all blue (OS2), lime green (OM5), heather violet (OM4), aqua (OM3) or E2000 APC adapters, all green (OS2)



P | Cabling

Data sheet

Page 2/5

OpDAT fix patch panel VIK 24xE2000 APC (green), OS2, gray

P/N

1502505924-E

EAN 4251394600369

2021/09/28

Version: B

Technical Data

General Data

Fields of application

Structured building cabling, Office
Data center

Design patch panel

Mounting style 1RU

Transmission technology Fiber optic

Port numbering yes

Color green

Dimensions

Dimension (L x W x H) 244.5 mm x 482.6 mm x 44.45 mm

Dimension (L x W x H) 9.626 in. x 19 in. x 1.75 in.

Inches 19 inches

Height unit 1RU

Installation depth 243 mm

Installation depth 9.567 in.

Fiber class OS2: IEC 60793-2-50 B6_a, B6_b & ITU-T G.657.A, G.652.D

Mode type of the fiber Singlemode

Shape APC (Angled Physical Contact)

Fiber construction 9/125 µm

Labeling option printed numbers

Connections/interfaces

Connector technology interface 1 E2000-S Couplers

Connector technology interface 2 E2000-S Couplers

Number of ports interface 1 24

Number of ports interface 2 24

Number of equipped ports interface 1 24

Number of ports interface 2 equipped 24

Number of ports with dust protection interface 1 24

Number of ports with dust protection interface 2 24

Cable access/outlet several possibilities for cable entry on the back



P | Cabling

Data sheet

Page 3/5

OpDAT fix patch panel VIK 24xE2000 APC (green), OS2, gray

P/N

1502505924-E

EAN 4251394600369

2021/09/28

Version: B

Technical Data

Mechanical data

Life - Number of mating cycles	min. 1000
strain relief	yes

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	sheet steel
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics
RoHS	compliant

Classifications

ETIM 6.0	EC001130
ETIM 7.0	EC001130
ETIM 8.0	EC001130

Packing details

Type of packaging	1 pc(s) / box
Packaging dimension	540 mm x 380 mm x 60 mm
Packaging dimension	21.26 in. x 14.961 in. x 2.362 in.



P | Cabling

Data sheet

Page 4/5

OpDAT fix patch panel VIK 24xE2000 APC (green), OS2, gray

P/N

1502505924-E

EAN 4251394600369

2021/09/28

Version: B

Accessories

P/N	Designation
130792	Mounting kit, cage nuts M6
1502500000-E	OpDAT PF/fix patch cord tray gray
15081106-E	OpDAT mounting plate VIK
150811M20-E	Cable gland M20 (Clamping range 7 to 12 mm)
150811M25-E	Cable gland M25

P | Cabling

Data sheet

Page 5/5

OpDAT fix patch panel VIK
24xE2000 APC (green), OS2, gray

P/N
1502505924-E
EAN 4251394600369
 2021/09/28
 Version: B

Illustrations

Dimensional drawing

