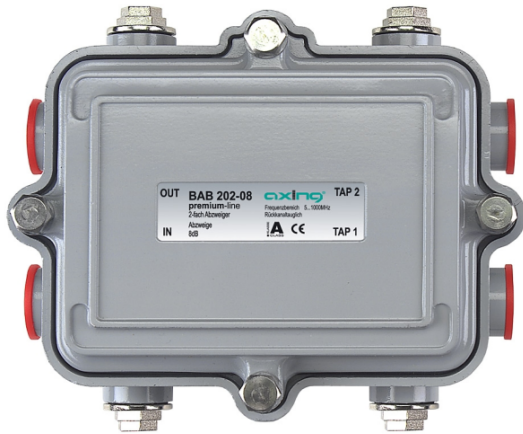


BAB 202-08 2-way tap | 8 dB | 5...1006 MHz | outdoor


- ✓ Tap method - directional coupler
- ✓ Trunk and tap DC/AC suitable with max. 65V~/10 A
- ✓ 5/8" Connectors
- ✓ Al die-cast housing with wall mounting bow
- ✓ Protection class IP 55

Order information

Type	BAB 202-08
Order no.	BAB20208
GTIN	7611682258080
PE	1
VE	1
EU customs tariff number	85291080


Technical data

Screening factor acc. to EN 50083-2	> 90 dB
Frequency range	5...1006 MHz
Tap loss	8 ±1.5 dB
Isolation	≥ 25 dB
Through loss	
5...40 MHz	≤ 3.5 dB
40...470 MHz	≤ 3.8 dB
470...862 MHz	≤ 4.2 dB
862...1006 MHz	≤ 4.3 dB
Connectors	
Connector type	5/8"
Return loss	≥ 18 dB
General	
Dimensions (W × H × D) appr.	140 × 120 × 80 mm
Weight	0.737 kg
Protection class	IP 55