

SPU 58-09 Aktiver Multischalter | 5 in 8 | premium-line



- ✓ For up to 8 subscribers
- ✓ Active satellite and terrestrial path
- ✓ Terrestrial adjustable, switchable to passive
- ✓ Cascadable
- ✓ Suitable for return path
- ✓ Suitable for Quad LNB
- ✓ Switching power supply unit (detachable up to 10 m)

Order information

Type	SPU 58-09
Order no.	SPU05809
GTIN	7611682001464
PE	1
VE	1
EU customs tariff number	85291095




Technical data

Inputs	
Number	5
Frequency range	5...65 MHz 85...862 MHz 950...2200 MHz
Attenuator adjustment range TERR, switchable to passive	20 dB
Subscriber ports	
Number	8
Switch commands	13/18 V, 0/22 kHz
Gain SAT	-6...0 dB
Gain TERR active	-5...0 dB
Gain TERR passive	-23...-25 dB
Isolation	>26 dB
Switching isolation	>26 dB
Max. output level SAT (3rd order SAT EN 50083 3 35dB KMA, 2 sender test method)	94 dBμV
Current consumption per port (without LNB supply)	25 mA
Trunk outputs	
Number	5
Gain TERR active	13...18 dB
Gain TERR passive	-5 dB
Gain SAT	11 dB
Max. output level TERR (3rd order EN 50083 3, 60 dB KMA)	103 dBμV
Max. output level trunk SAT (3rd order EN 50083 3, 35 dB KMA, 2 sender test method)	113 dBμV
Isolation	>26 dB
Rejection (SAT TERR)	>40 dB
Connectors	
Connector type	F
General	
Switching power supply	90...250 V~ 47-63 Hz 18 V=0.7A
Power indicator	LED
Power consumption without LNB supply (TERR passive active)	4.6 6.7 W
Power consumption in Stand-by (TERR passive active)	2.4 4.5 W
Equipotential bonding connection	4 mm²
Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W × H × D) appr.	195 × 190 × 85 mm
Weight	0.825 kg

Protection class

IP 20

Example of use

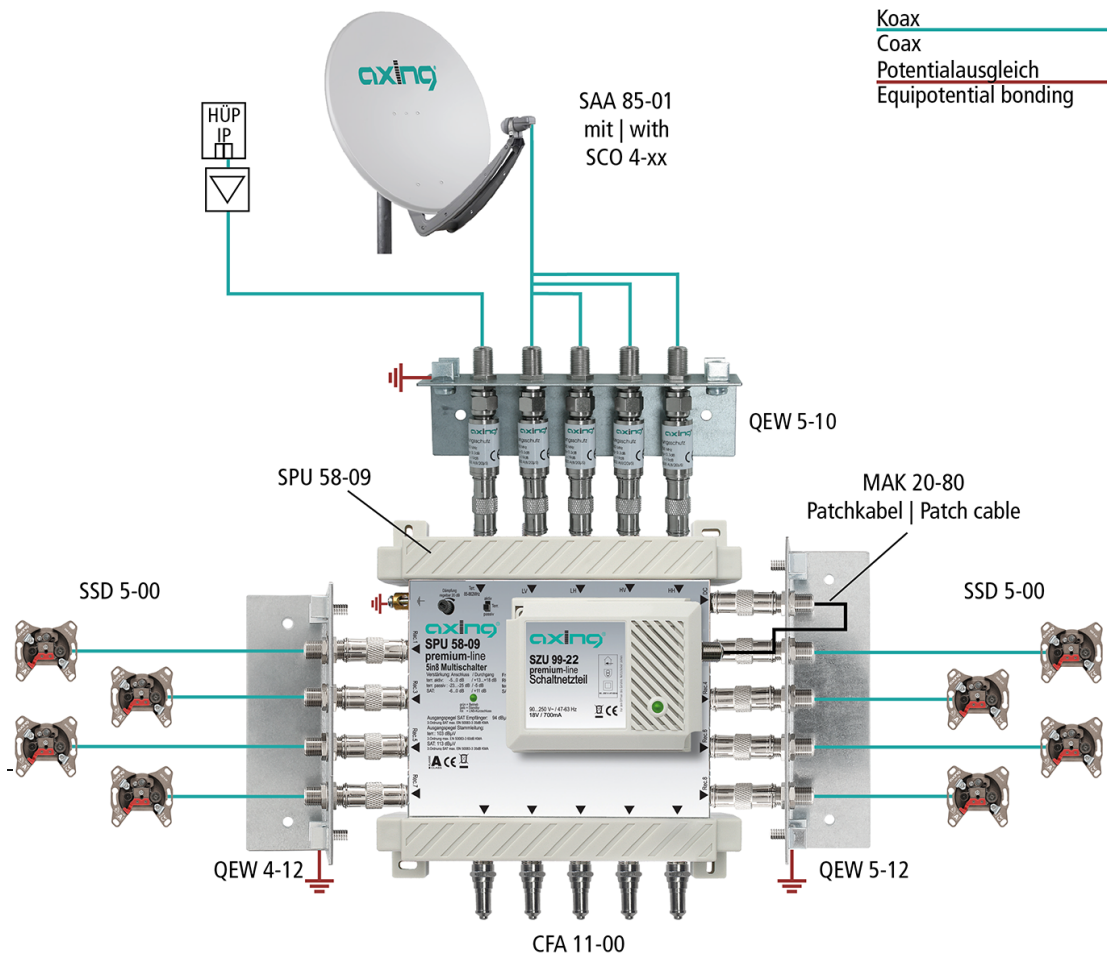

Suitable products

- QEW 5-10 Earthing angle | single-rowed | surge protection
- QEW 4-12 Earthing angle | single-rowed | quickfix
- QEW 5-12 Earthing angle | single-rowed | quickfix
- CFA 11-00 Terminating resistor | 75 Ohm | DC isolated
- CFA 4-01 Adapter F/F | Quickfix
- MAK 20-80 F | patch cable | axial connectors male | double shielded | 0.20 m