


SPU 9918-09 Cascade unit | 9 in 18 | premium-line

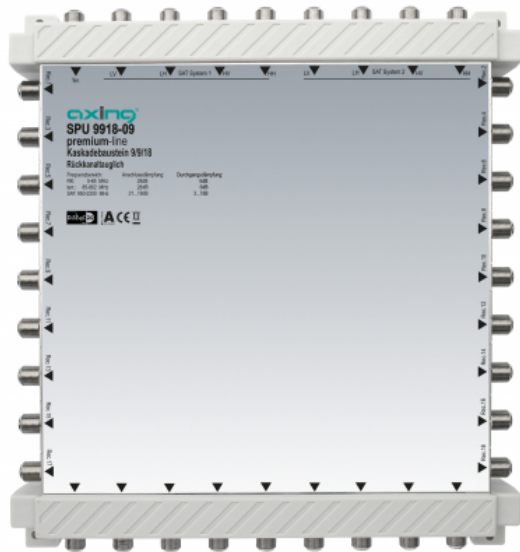

- ✓ For up to 18 subscribers
- ✓ Passive satellite and terrestrial path
- ✓ For cascadable 9 in x SAT systems
- ✓ Optimized for the use with SPU 9xx-09
- ✓ Suitable for return path

Order information

Type	SPU 9918-09
Order no.	SPU991809
GTIN	7611682139129
PE	1
VE	1
EU customs tariff number	85291095



Technical data

Inputs

Number	9
Frequency range	5...65 MHz 85...862 MHz 950...2200 MHz
Subscriber ports	
Number	18
Tap loss TERR	28 dB
Tap loss SAT	21...18 dB
Isolation	>26 dB
Switching isolation	>26 dB

Trunk outputs

Number	9
Through loss TERR	6 dB
Through loss SAT	3...7 dB
Isolation	>30 dB
Rejection (SAT TERR)	>40 dB

Connectors

Connector type	F
----------------	---

General

Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W × H × D) appr.	230 × 255 × 40 mm
Weight	1.135 kg

[illegible]

QEW 9-12 Earthing angle | single-rowed | quickfix
CFA 11-00 Terminating resistor | 75 Ohm
CFA 4-01 Adapter F/F | Quickfix