

Enlighten Optical Distribution Box Series - TEN-FWB6, 12F Outdoor

ENLIGHTEN

12-Fibre Optical Distribution Box

Designed for outdoor mounting this wall box allows easy connection between feeder cables and subscriber cables. The wall box is equipped with a splice tray and lock for secure fixing of box lid.

Features


- 2 inlets and 12 outlet drop ports.
- Easy to install and maintain. Separate cup-joint way for placing the feeder cable. Separate tray for ease of splice connections.
- Lockable lid to avoid unauthorized access.
- Designed for long term performance waterproof, dustproof and manufactured in anti-aging material the Teleste TEN-FWB6 is an optimal, rugged IP65 connectivity solution.





ENLIGHTEN OPTICAL PASSIVES / OPTICAL DISTRIBUTION BOX SERIES

GENERAL			
Max. input cable dia.	18 mm	Max. output cable dia.	4.5 mm
Dimension (LxWxH)	250x190x72 mm	Weight	0.40 kg
Material	PC Alloy	Supported adaptors	SC simplex, LC Duplex
Operating temperature	-40 - +80 °C	IP protection class	IP 65
Colour	White (RAL9010)	Type of installation	Wall-mount and Pole-mount

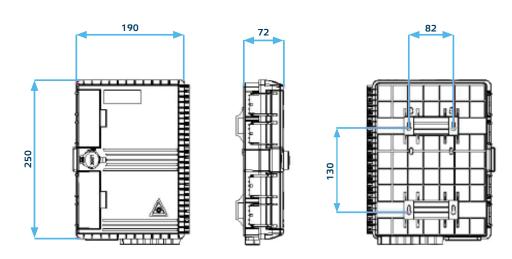

ORDERING INFORMATION		
P/N	DESCRIPTION	
TEN-FWB6-0	FTTH wall box 6 without adapters and pigtails	
TEN-FWB6-12SCA0	FTTH wall box 6 with 12 x SC/APC adapters and no pigtails	
TEN-FWB6-12SCAP	FTTH wall box 6 with 12 x SC/APC adapters and 12 x pigtails	
TEN-FWB6-12LCA0	FTTH wall box 6 with 12 x LC/APC duplex adapters and no pigtails	
TEN-FWB6-12LCAP	FTTH wall box 6 with 12 x LC/APC duplex adapters and 24 x pigtails	



TELESTE CORPORATION www.teleste.com

Enlighten Optical Distribution Box Series TEN-FWB6_190515