


## BAB 1-12P 1-way tap | 12 dB | 5...1218 MHz

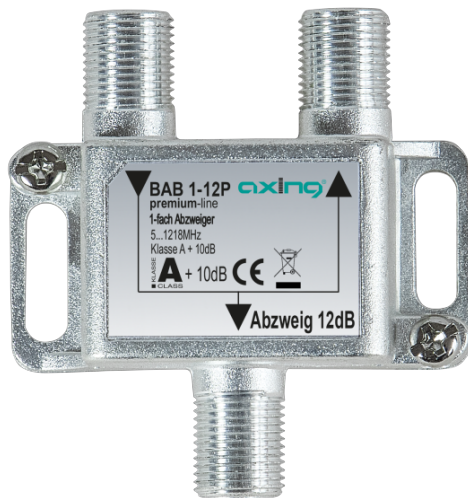

- ✓ High return loss
- ✓ For multimedia-use
- ✓ Inputs and outputs hum-suppressed
- ✓ High intermodulation suppression
- ✓ Class A (+10 dB) according to EN 50083-2
- ✓ Return loss and isolation according to VKFD TS 220
- ✓ Vodafone Kabel Deutschland approved

## Order information

|                          |               |
|--------------------------|---------------|
| Type                     | BAB 1-12P     |
| Order no.                | BAB00112P     |
| GTIN                     | 7611682005677 |
| PE                       | 1             |
| VE                       | 1             |
| EU customs tariff number | 85291080      |



## Technical data

|                                    |                 |
|------------------------------------|-----------------|
| Frequency range                    | 5...1218 MHz    |
| Intermodulation ratio (EN 60728-4) | 120 dBμV        |
| Tap loss                           |                 |
| 5...94 MHz                         | ≤ 12.2 dB       |
| 94...188 MHz                       | ≤ 12.1 dB       |
| 188...376 MHz                      | ≤ 12 dB         |
| 376...752 MHz                      | ≤ 12 dB         |
| 752...950 MHz                      | ≤ 11.8 dB       |
| 950...1218 MHz                     | ≤ 11.9 dB       |
| Through loss                       |                 |
| 5...94 MHz                         | ≤ 0.6 dB        |
| 94...188 MHz                       | ≤ 0.5 dB        |
| 188...376 MHz                      | ≤ 0.6 dB        |
| 376...752 MHz                      | ≤ 0.9 dB        |
| 752...950 MHz                      | ≤ 1 dB          |
| 950...1218 MHz                     | ≤ 1.3 dB        |
| Return loss                        |                 |
| 5...94 MHz                         | ≥ 18 dB         |
| 94...188 MHz                       | ≥ 16.5 dB       |
| 188...376 MHz                      | ≥ 15 dB         |
| 376...752 MHz                      | ≥ 13.5 dB       |
| 752...1218 MHz                     | ≥ 12 dB         |
| Connectors                         |                 |
| Connector type                     | F               |
| General                            |                 |
| Dimensions (W × H × D) appr.       | 67 × 55 × 30 mm |
| Weight                             | 0.045 kg        |