


SAB 4-16 4-fach SAT-Abzweiger | 16 dB | 5...2400 MHz

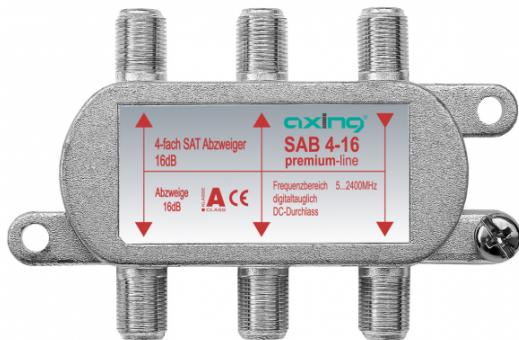

- ✓ DC power pass on trunk
- ✓ Connectors gold-plated

Order information

Type	SAB 4-16
Order no.	SAB00416
GTIN	7611682274165
PE	1
VE	1
EU customs tariff number	85291080



Technical data

Screening factor acc. to EN 50083-2	> 90 dB
Frequency range	5...2400 MHz
DC power pass	yes
Tap loss	
5...862 MHz	16 ±1.5 dB
Isolation	
950...1750 MHz	≥ 22 dB
1750...2400 MHz	16 ±1.5 dB
Through loss	
5...862 MHz	< 3.5 dB
950...1750 MHz	< 2.5 dB
1750...2400 MHz	< 6.0 dB
Directivity	
5...862 MHz	≥ 35 dB
950...1750 MHz	≥ 30 dB
1750...2400 MHz	≥ 22 dB
Return loss	
Taps @ 5...862 MHz	≥ 12 dB
Input @ 5...862 MHz	≥ 15 dB
Taps @ 950...1750 MHz	≥ 10 dB
Input @ 950...1750 MHz	≥ 15 dB
Taps @ 1750...2400 MHz	≥ 10 dB
Input @ 1750...2400 MHz	≥ 12 dB
Output @ 5...862 MHz	≥ 12 dB
Output @ 950...1750 MHz	≥ 12 dB
Output @ 1750...2400 MHz	≥ 12 dB
Isolation	
5...862 MHz	≥ 22 dB
950...1750 MHz	≥ 22 dB
Tap loss	
1750...2400 MHz	≥ 16 dB
Connectors	
Connector type	F
General	
Dimensions (W × H × D) appr.	93 × 65 × 18 mm
Weight	0.112 kg