


## SSD 6-14 Programmable single cable loop-through outlet 14 dB | 5 ... 2200 MHz | CATV | SAT

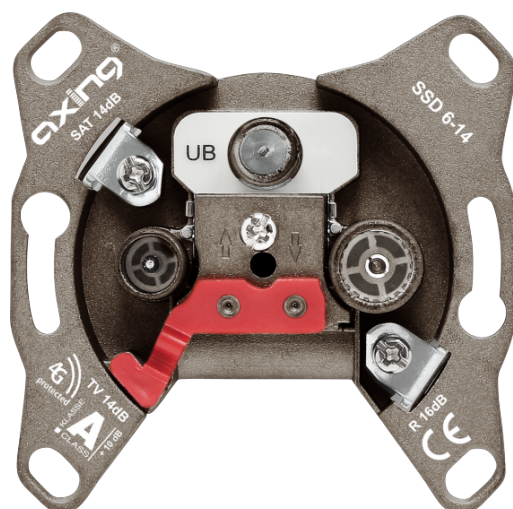

- ✓ Class A (+10 dB) according to EN 50083-2
- ✓ Suitable for return path 5 ... 65 MHz
- ✓ Suitable for Unicable I (EN50494) and Unicable II (EN50607)
- ✓ Each socket can be allocated to one ore more user-bands (programming with the SZU 60-00 programmer and the free-of charge software AnDoKon (www.axing.com | download))
- ✓ Easy to install
- ✓ Stripping length 8/13 mm
- ✓ Extended F socket
- ✓ Surface treated

### Order information

|                          |               |
|--------------------------|---------------|
| Type                     | SSD 6-14      |
| Order no.                | SSD00614      |
| GTIN                     | 7611682002317 |
| PE                       | 1             |
| VE                       | 1             |
| EU customs tariff number | 85291095      |



### Technical data

|                                                    |                                     |
|----------------------------------------------------|-------------------------------------|
| Screening factor acc. to EN 50083-2                | Class A (+ 10 dB)                   |
| Tap method                                         | Filter circuit/directional coupler  |
| Trunk line                                         |                                     |
| Frequency range input                              | 5 ... 2200 MHz                      |
| Through loss @ 5...862 MHz                         | ≤ 1.3 dB                            |
| Through loss @ 862...2200 MHz                      | ≤ 2.5 dB                            |
| Frequency range output                             | 5 ... 2200 MHz                      |
| DC power pass                                      | yes                                 |
| Suitable cables (Inner conductor   outer diameter) | 0.63 ... 1.13 mm   4.70 ... 7.35 mm |
| TV connector                                       |                                     |
| Connector type                                     | IEC-male                            |
| Frequency range                                    | 109 ... 862 MHz   5 ... 65MHz       |
| Tap loss                                           | 14 dB ±1.5 dB                       |
| Radio connector                                    |                                     |
| Connector type                                     | IEC-female                          |
| Frequency range                                    | 87.5 ... 108 MHz                    |
| Tap loss                                           | 16 dB ±2.0 dB                       |
| SAT connector                                      |                                     |
| Connector type                                     | F-female                            |
| Frequency range                                    | 950 ... 2200 MHz                    |
| DC power pass to trunk                             | yes                                 |
| General                                            |                                     |
| Dimensions (W × H × D) appr.                       | 68 × 68 × 39 mm                     |
| Weight                                             | 0.102 kg                            |

### Suitable products

[SZU 2-00 Cover plate | TV/R/SAT | single piece](#)

[TZU 1-00 Surface frame](#)

[SZU 2-10 Cover plate | TV/R/SAT | two-parts](#)

[TZU 1-10 Surface frame](#)

[TZU 3-01 Terminating resistor, DC-isolated](#)