

Data sheet


OpDAT slide patch panel VIK
12xE2000 (lime green), OM5, gray

Page 1/4


P/N
1502605M12-E
 EAN 4251394607214

2018-16-01

Illustrations

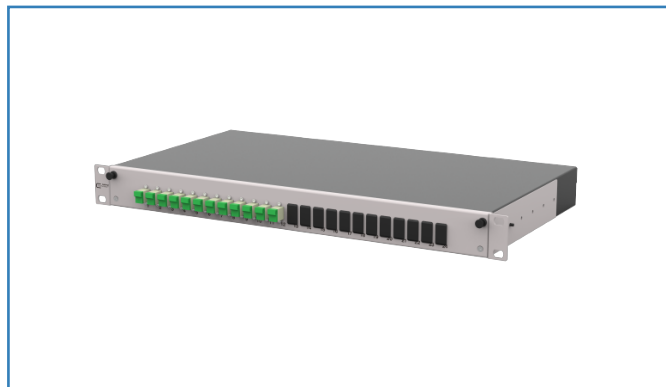

Dimensional drawing

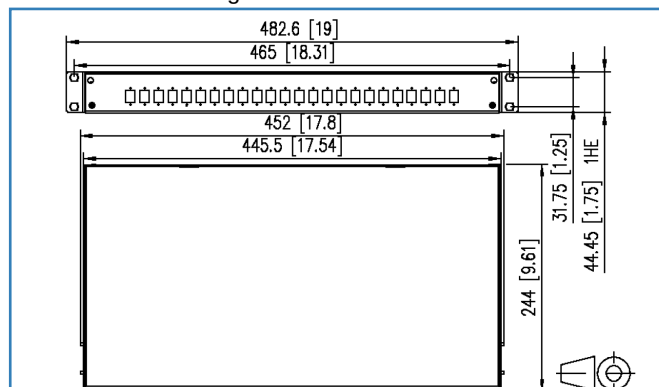

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel with pull-out splice tray / front cover in RAL 7035
- splice tray can be tilted and removed completely for better mounting (end stop)
- equipped with E2000 adapters
- unused cutouts are closed by blank plugs
- installation depth 240 mm (without cable gland and coupler)
- several possibilities for cable entry on the back (fastening with PG13.5, PG16 and PG21 or M20 and M25)
- variants: equipped with 6, 12 or 24 E2000 adapters, all blue (OS2), lime green (OM5), heather violet (OM4) or aqua (OM3) or E2000 APC adapters, all green (OS2)



Data sheet

Page 2/4

OpDAT slide patch panel VIK 12xE2000 (lime green), OM5, gray

P/N

1502605M12-E

EAN 4251394607214

2018-16-01

Technical Data

General Data

Fields of application	Data center
Design	patch panel
Mounting style	1RU
Transmission technology	Fiber optic
Port numbering	yes
Color	lime green
Dimensions	
Dimension (L x W x H)	244.00 x 482.60 x 44.45 mm
Dimension (L x W x H)	9.606 x 19.00 x 1.75 in.
Inches	19 inches
Height unit	1RU
Installation depth	244.00 mm
Installation depth	9.606 in.
Fiber class	OM5: ISO/IEC 11801/EN 50173 & IEC 60793-2-10/EN 60793-2-10 A1.a.4
Mode type of the fiber	Multimode
Fiber construction	50/125 µm
Labeling option	printed numbers

Connections/interfaces

Connector technology interface 1	E2000 Couplers
Connector technology interface 2	E2000 Couplers
Number of ports interface 1	24
Number of ports interface 2	24
Number of equipped ports interface 1	12
Number of ports interface 2 equipped	12
Number of ports with dust protection interface 1	12
Number of ports with dust protection interface 2	12
Number of blind covers interface 2	12

Mechanical characteristics

Life - Number of mating cycles	min. 1000
--------------------------------	-----------



Data sheet

Page 3/4

OpDAT slide patch panel VIK 12xE2000 (lime green), OM5, gray

P/N

1502605M12-E

EAN 4251394607214

2018-16-01

Technical Data

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	sheet steel
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics

Approvals

RoHS	compliant
------	-----------

The product meets the following standards

Fibre optic connector interfaces	DIN EN 61754-15
----------------------------------	-----------------

Packing details

Type of packaging	1 pc(s) / box
Packaging dimension (W x H x D)	540.00 x 380.00 x 60.00 mm
Packaging dimension (W x H x D)	21.26 x 14.961 x 2.362 in.



Illustrations

Dimensional drawing

