

Data sheet

OpDAT slide R patch panel VIK
24xE2000-D APC (green), OS2, gray


Page 1/4

P/N
1502705F24-E
 EAN 4251394618586
 2019/12/04

Illustrations



Dimensional drawing

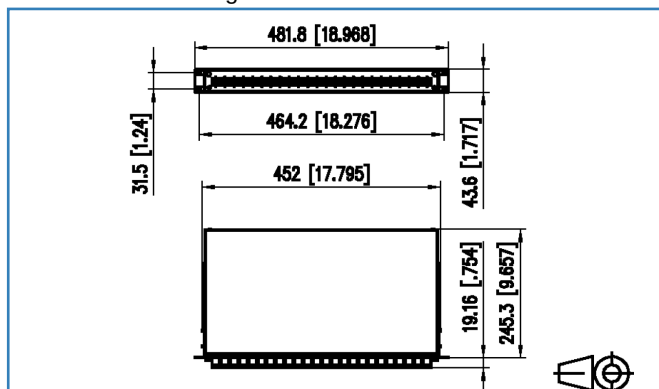

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel with pull-out splice tray / front cover (gray or black)
- for high mechanical stresses
- equipped with E2000-D couplers
- splice tray can be tilted and removed completely for better mounting (end stop)
- unused cutouts are closed by blank plugs
- Fixation with captive knurled screws
- installation depth 240 mm (without cable gland and coupler)
- several possibilities for cable entry on the back (fastening with PG13.5, PG16 and PG21 or M20 and M25)
- variants: equipped with 6, 12 or 24 E2000-D adapters, all blue (OS2), lime green (OM5), heather violet (OM4) or aqua (OM3) or with 6, 12 or 24 E2000-D APC adapters, all green (OS2)



P | Cabling

Data sheet

Page 2/4

OpDAT slide R patch panel VIK 24xE2000-D APC (green), OS2, gray

P/N

1502705F24-E

EAN 4251394618586

2019/12/04

Technical Data

General Data

Fields of application

Structured building cabling, Office

Data center

Design patch panel

Mounting style 1RU

Transmission technology Fiber optic

Port numbering yes

Color green

Dimensions

Dimension (L x W x H) 264.46 mm x 481.8 mm x 43.6 mm

Dimension (L x W x H) 10.411 in. x 18.968 in. x 1.717 in.

Inches 19 inches

Height unit 1RU

Installation depth 244 mm

Installation depth 9.606 in.

Fiber class for OS2

Mode type of the fiber Singlemode

Shape APC (Angled Physical Contact)

Fiber construction 9/125 µm

Labeling option printed numbers

Connections/interfaces

Connector technology interface 1 E2000-D Couplers

Connector technology interface 2 E2000-D Couplers

Number of ports interface 1 24

Number of ports interface 2 24

Number of equipped ports interface 1 24

Number of ports interface 2 equipped 24

Number of ports with dust protection interface 1 24

Number of ports with dust protection interface 2 24

Cable access/outlet several possibilities for cable entry on the back

Mechanical characteristics

Connector type duplex

strain relief yes



Data sheet

Page 3/4

OpDAT slide R patch panel VIK 24xE2000-D APC (green), OS2, gray

P/N

1502705F24-E

EAN 4251394618586

2019/12/04

Technical Data

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	sheet steel
Material - Front cover finish	powder-coated
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics
RoHS	compliant

Classifications

ETIM 5.0	EC001130
ETIM 6.0	EC001130
ETIM 7.0	EC001130



P | Cabling

Data sheet

OpDAT slide R patch panel VIK
24xE2000-D APC (green), OS2, gray

Page 4/4

P/N

1502705F24-E

EAN 4251394618586

2019/12/04

Illustrations

Dimensional drawing

