


Data sheet

OpDAT slide R patch panel VIK
24xLC-D (blue), OS2, gray


Page 1/4

P/N
1502707424-E
EAN 4251394618593
 2019/12/04

Illustrations

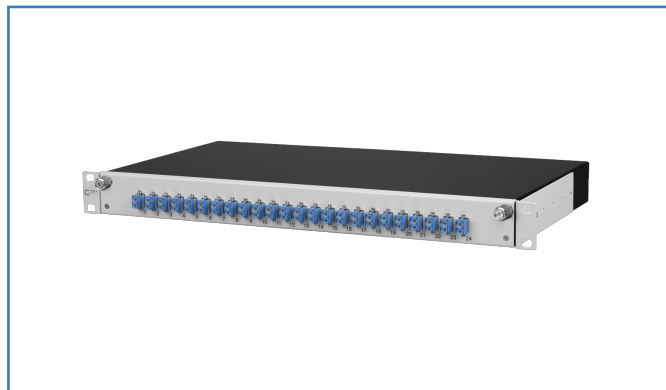

Dimensional drawing

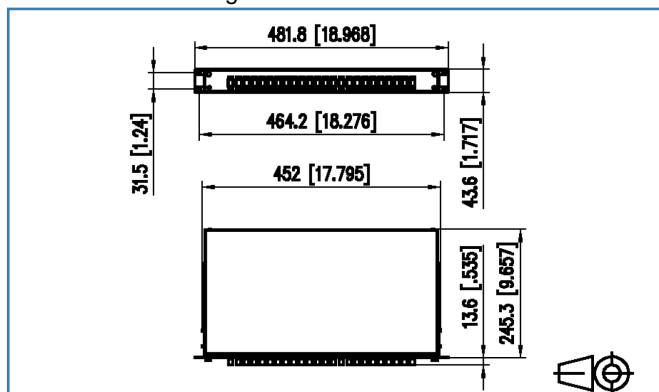

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel with pull-out splice tray / front cover (gray or black)
- for high mechanical stresses
- equipped with LC-D couplers
- splice tray can be tilted and removed completely for better mounting (end stop)
- unused cutouts are closed by blank plugs
- Fixation with captive knurled screws
- installation depth 240 mm (without cable gland and coupler)
- several possibilities for cable entry on the back (fastening with PG13.5, PG16 and PG21 or M20 and M25)
- variants: equipped with 6, 12 or 24 LC-D adapters, all blue (OS2), lime green (OM5), heather violet (OM4) or aqua (OM3) or with 6, 12 or 24 LC-D APC adapters, all green (OS2)



P | Cabling

Data sheet

OpDAT slide R patch panel VIK 24xLC-D (blue), OS2, gray

Page 2/4

P/N

1502707424-E

EAN 4251394618593

2019/12/04

Technical Data

General Data

Fields of application

	Structured building cabling, Office Data center
Design	patch panel
Mounting style	1RU
Transmission technology	Fiber optic
Port numbering	yes
Color	blue
Dimensions	
Dimension (L x W x H)	256.9 mm x 481.8 mm x 43.6 mm
Dimension (L x W x H)	10.192 in. x 18.968 in. x 1.717 in.
Inches	19 inches
Height unit	1RU
Installation depth	244 mm
Installation depth	9.606 in.
Fiber class	for OS2
Mode type of the fiber	Singlemode
Shape	UPC (Ultra Physical Contact)
Fiber construction	9/125 µm
Labeling option	printed numbers

Connections/interfaces

Connector technology interface 1	LC-D Couplers
Connector technology interface 2	LC-D Couplers
Number of ports interface 1	24
Number of ports interface 2	24
Number of equipped ports interface 1	24
Number of ports interface 2 equipped	24
Number of ports with dust protection interface 1	24
Number of ports with dust protection interface 2	24
Cable access/outlet	several possibilities for cable entry on the back

Mechanical characteristics

Connector type	duplex
strain relief	yes



Data sheet

Page 3/4

OpDAT slide R patch panel VIK 24xLC-D (blue), OS2, gray

P/N

1502707424-E

EAN 4251394618593

2019/12/04

Technical Data

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	sheet steel
Material - Front cover finish	powder-coated
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics
RoHS	compliant

The product meets the following standards

Fibre optic connector interfaces	IEC 61754-20
----------------------------------	--------------

Classifications

ETIM 5.0	EC001130
ETIM 6.0	EC001130
ETIM 7.0	EC001130



P | Cabling

Data sheet

OpDAT slide R patch panel VIK
24xLC-D (blue), OS2, gray

Page 4/4

P/N

1502707424-E

EAN 4251394618593

2019/12/04

Illustrations

Dimensional drawing

