

## Data sheet

**OpDAT slide R patch panel VIK**  
**24xSC-D (violet), OM4, gray**


Page 1/4

P/N  
**150270BB24-E**  
 EAN 4251394633008  
 2019/12/04

## Illustrations



Dimensional drawing

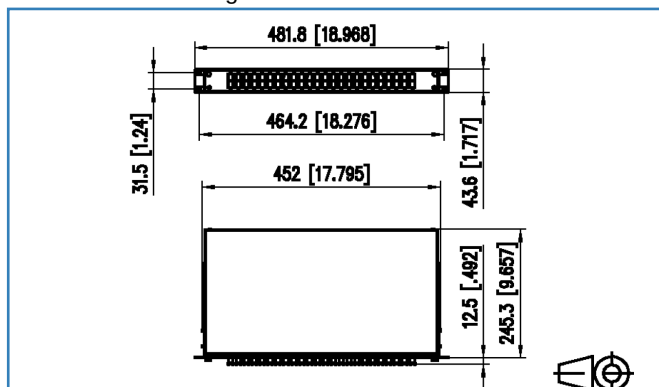

See enlarged drawings at the end of document

## Product specification

- 19 inch 1RU fiber optic patch panel with pull-out splice tray / front cover (gray or black)
- for high mechanical stresses
- equipped with SC-D couplers
- splice tray can be tilted and removed completely for better mounting (end stop)
- unused cutouts are closed by blank plugs
- Fixation with captive knurled screws
- installation depth 240 mm (without cable gland and coupler)
- several possibilities for cable entry on the back (fastening with PG13.5, PG16 and PG21 or M20 and M25)
- variants: equipped with 6, 12 or 24 SC-D adapters, all blue (OS2), lime green (OM5), heather violet (OM4) or aqua (OM3) or with 6, 12 or 24 SC-D APC adapters, all green (OS2)



# P | Cabling

## Data sheet

Page 2/4

## OpDAT slide R patch panel VIK 24xSC-D (violet), OM4, gray

P/N

150270BB24-E

EAN 4251394633008

2019/12/04

## Technical Data

### General Data

#### Fields of application

|                         |                                                    |
|-------------------------|----------------------------------------------------|
|                         | Structured building cabling, Office<br>Data center |
| Design                  | patch panel                                        |
| Mounting style          | 1RU                                                |
| Transmission technology | Fiber optic                                        |
| Port numbering          | yes                                                |
| Color                   | violet                                             |
| Dimensions              |                                                    |
| Dimension (L x W x H)   | 257.8 mm x 481.8 mm x 43.6 mm                      |
| Dimension (L x W x H)   | 10.149 in. x 18.968 in. x 1.717 in.                |
| Inches                  | 19 inches                                          |
| Height unit             | 1RU                                                |
| Installation depth      | 244 mm                                             |
| Installation depth      | 9.606 in.                                          |
| Fiber class             | for OM4                                            |
| Mode type of the fiber  | Multimode                                          |
| Fiber construction      | 50/125 µm                                          |
| Labeling option         | printed numbers                                    |

### Connections/interfaces

|                                                  |                                                   |
|--------------------------------------------------|---------------------------------------------------|
| Connector technology interface 1                 | SC-D Couplers                                     |
| Connector technology interface 2                 | SC-D Couplers                                     |
| Number of ports interface 1                      | 24                                                |
| Number of ports interface 2                      | 24                                                |
| Number of equipped ports interface 1             | 24                                                |
| Number of ports interface 2 equipped             | 24                                                |
| Number of ports with dust protection interface 1 | 24                                                |
| Number of ports with dust protection interface 2 | 24                                                |
| Cable access/outlet                              | several possibilities for cable entry on the back |

### Mechanical characteristics

|                |                  |
|----------------|------------------|
| Cut-out        | SC-D, LC-Q, ST-D |
| Connector type | duplex           |
| strain relief  | yes              |



## Data sheet

Page 3/4

## OpDAT slide R patch panel VIK 24xSC-D (violet), OM4, gray

P/N

150270BB24-E

EAN 4251394633008

2019/12/04

## Technical Data

### Materials and material properties

|                               |                  |
|-------------------------------|------------------|
| Material - Housing            | Al (Aluminium)   |
| Material - Front cover        | sheet steel      |
| Material - Front cover finish | powder-coated    |
| Material - Sleeve             | ceramic, slotted |
| Material - Coupler housing    | Plastics         |
| RoHS                          | compliant        |

### The product meets the following standards

|                                  |             |
|----------------------------------|-------------|
| Fibre optic connector interfaces | IEC 61754-4 |
|----------------------------------|-------------|

### Classifications

|          |          |
|----------|----------|
| ETIM 5.0 | EC001130 |
| ETIM 6.0 | EC001130 |
| ETIM 7.0 | EC001130 |



# P | Cabling

## Data sheet

**OpDAT slide R patch panel VIK**  
**24xSC-D (violet), OM4, gray**

Page 4/4

P/N

150270BB24-E

EAN 4251394633008

2019/12/04

## Illustrations

Dimensional drawing

