


J/A-W(ZN)11Y(ZN)11Y 2F

This cable is suitable for indoor or outdoor installation.

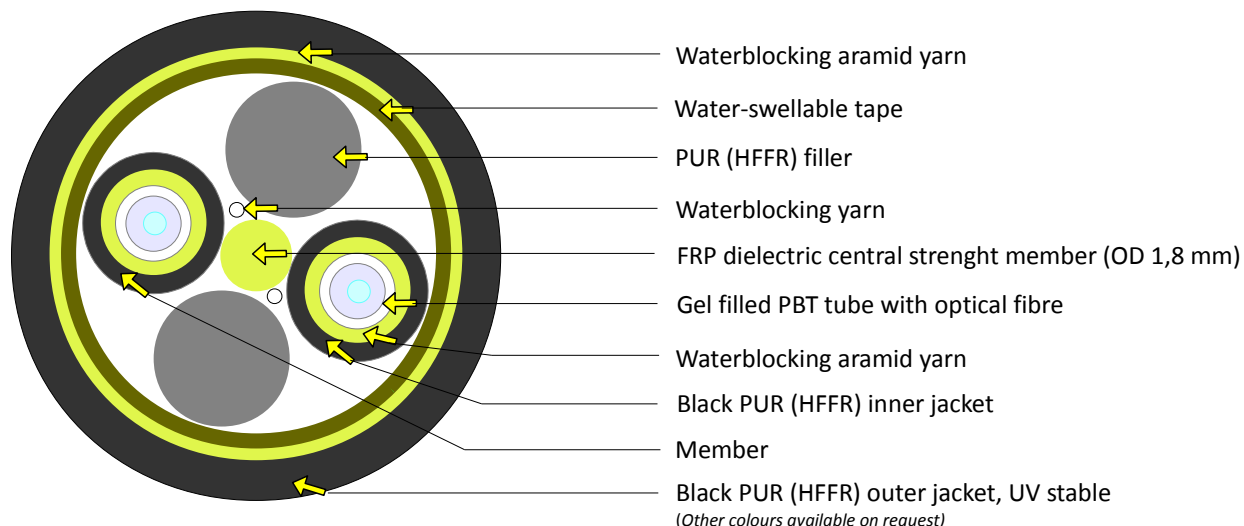

Mechanical and environmental properties

Test	Value	Unit	Method
Cable outer diameter	12,9±0,4	mm	EN 60811-203
Cable weight	130	kg/km	
Outer jacket thickness	1,8	mm	
Loose tube diameter	1,5	mm	
Member diameter	3,5	mm	
Max. tensile strength	1000	N	EN 60794-1-21-E1
Crush resistance test	1000	N	EN 60794-1-21-E3
Impact resistance test	15	Nm	EN 60794-1-21-E4
Min. bend radius (no load)	10	× OD	EN 60794-1-21-E11a
Min. bend radius (load)	12	× OD	EN 60794-1-21-E11b
Moisture resistance test	pass		EN 60794-1-22-F5
Temperature range	Installation -30 to + 50	°C	EN 60794-1-22-F1
	Operation -30 to + 70	°C	
	Storage -40 to + 70	°C	

Cable life time - minimum 30 years

Sheat marking

Print colour	White
Print method	INK-Jet or Hot-foil
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Simplex jacket

Material	HFFR PUR
Colour	Black

Other jacket colours available on request

Fibre type

Single mode fiber	9/125
Multi mode fiber	50/125
Multi mode fiber	62,5/125

See the Fibre Specification sheet

Packing

Depending on ordered put-up lengths

