


End A

End B

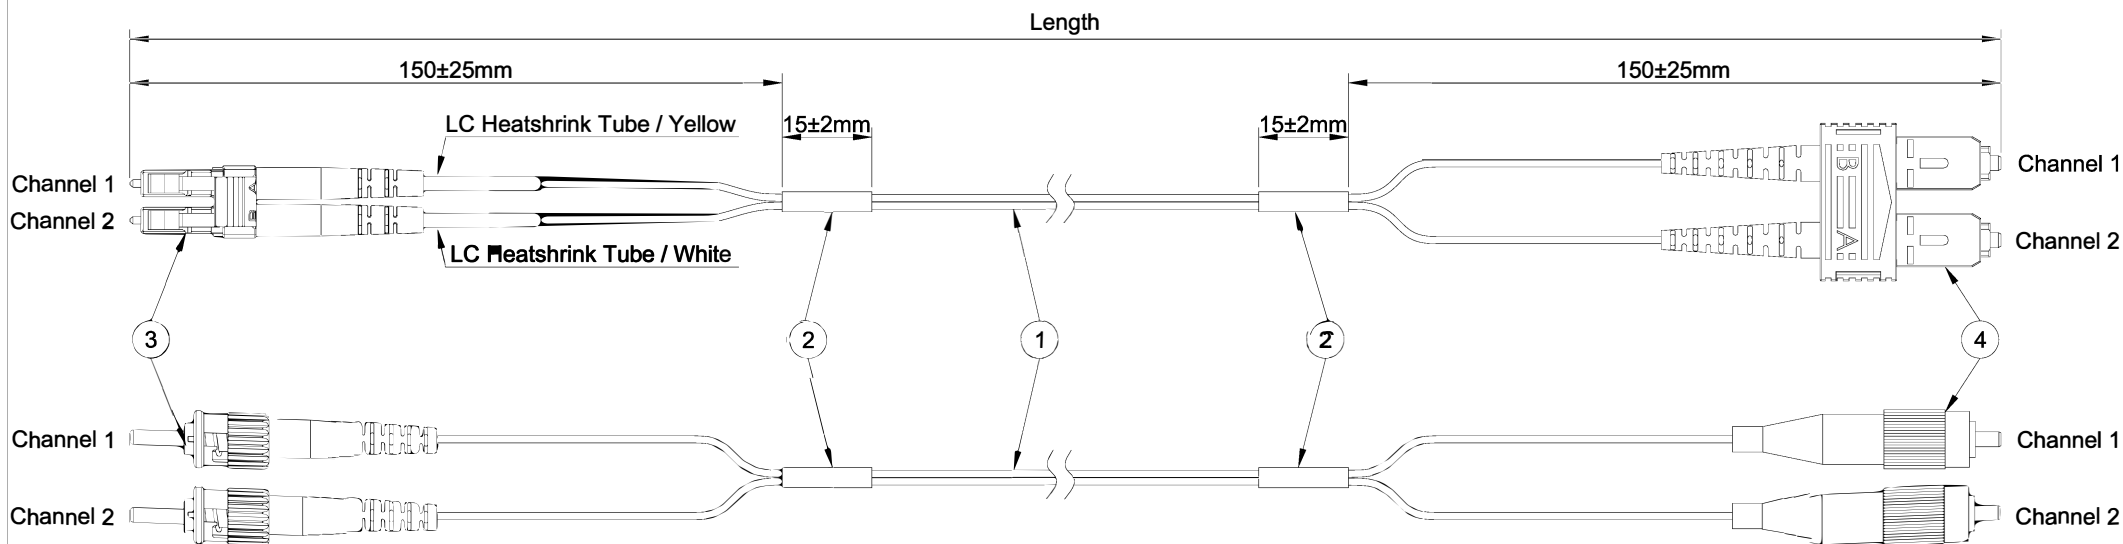

Cable Option

Note: Connector Option See Page 2

Length Tolerance:
+50mm/-0(Length<1M);
+100mm/-0(1M≤Length≤10M);
+1%/-0(Length>10M).

Fiber Type	Cable Colour
G657A1	Yellow
G657A2	
G652D	
OM1	Orange
OM2	
OM3	Aqua
OM4	Aqua / Erika Violet

Connector Performance


End Face Type		IL		RL
		Standard	Low Loss	
Single Mode	UPC	0.15 dB	0.10 dB	50 dB
	APC	0.15 dB	0.10 dB	60 dB
Multi Mode	UPC	0.15 dB	0.10 dB	26 dB

NO.	Specifications				Qty.
1	Ø1.2/1.6/2.0mm Duplex Cable				1
2	Heatshrink Tube / Black				2
3	End A 2.0 Connector				1
4	End B 2.0 Connector				1
01	First Issue			JQ.ZHANG	10-15-2020
REV	REVISION RECORD DESP.	ECN.NO	ZONE	BY	DATE


TOLERANCE	±MM	PART DESCRIPTION			PART NO.	
X	——	1.2/1.6/2.0 Duplex Patchcord			--	
X.X	——	DRAWN		CHKD		APROVED
X.XX	——	JQ.ZHANG		FY.LIANG		Dylan Chen
X.XXX	——	SCALE	UNIT	QTY	PAGE	THIRD ANGLE
REV	——	——	mm	1 PCS	1 OF 2	PROJECTION
P/N	——	FIBRE 2 EU Fibre 2 EU GmbH				

Connecotr Option


Fiber Type	Connector Type	Boot Colour (LC Heatshrink Tube Colour)				Housing Colour	Duplex Clip Colour
		End A		End B			
		Channel 1	Channel 2	Channel 1	Channel 2		
Single Mode	LC/UPC	White (Yellow)	White (White)	White (Yellow)	White (White)	Blue	Blue
	LC/APC	Green (Yellow)	Green (White)	Green (Yellow)	Green (White)	Green	Green
	SC/UPC	Blue	Blue	Blue	Blue	Blue	Blue
	SC/APC	Green	Green	Green	Green	Green	Green
	FC/UPC	Black	Black	Black	Black	Silver	N/A
	FC/APC	Green	Green	Green	Green	Silver	N/A
	ST/UPC	Black	Black	Black	Black	Silver	N/A
	ST/APC	Green	Green	Green	Green	Silver	N/A
Multi Mode	LC/UPC	White (Yellow)	White (White)	White (Yellow)	White (White)	Beige	Beige
	SC/UPC	Beige	Beige	Beige	Beige	Beige	Beige
	FC/UPC	Black	Black	Black	Black	Silver	N/A
	ST/UPC	Black	Black	Black	Black	Silver	N/A




LC Duplex Connector with Duplex Clip




ST Connector



SC Duplex Connector with Duplex Clip




FC Connector-Gum Boot



FC Connector-Net Boot

01	First Issue			JQ.ZHANG	10-15-2020
REV	REVISION RECORD DESP.	ECN.NO	ZONE	BY	DATE

TOLERANCE	±MM	PART DESCRIPTION		PART NO.	
X	—	1.2/1.6/2.0 Duplex Patchcord		--	
X.X	—	DRAWN JQ.ZHANG		CHKD FY.LIANG	APROVED Dylan Chen
X.XX	—	SCALE —	UNIT mm	QTY 1 PCS	PAGE 2 OF 2
X.XXX	—	THIRD ANGLE PROJECTION 			
REV	—	FIBRE 2 EU Fibre 2 EU GmbH			
P/N	—				