

Data sheet

OpDAT fix patch panel VIK
24xST-D (metal), SM+MM, gray

Page 1/4


P/N
150250D124-E
 EAN 4250184126881

2017-20-12

Illustrations



Dimensional drawing

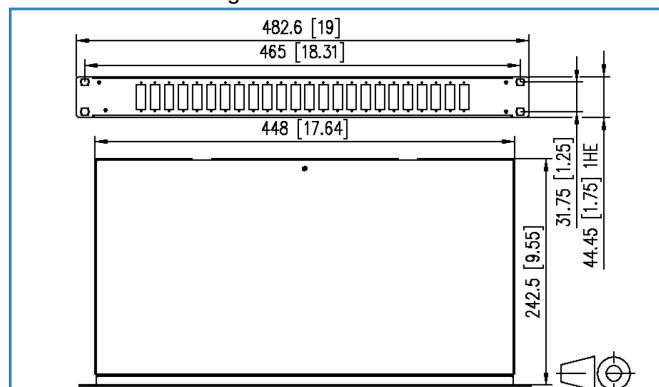

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel for fixed installation
- equipped with ST-D adapters
- prepared for fixation of pre-terminated installation cables (OpDAT VIK)
- light aluminum construction with steel sheet front plate painted in RAL 7035
- unoccupied recesses are closed with blind plugs
- removable front plate for easy adapter mounting
- screwed on cover for easy access during service work
- installation depth 240 mm (without cable gland and adapters)
- several possibilities for cable entry on the back (fastening with PG13.5, PG16 and PG21 or M20 and M25)
- toolless fastening of pre-assembled installation cables (OpDAT VIK) in a U-shaped cutout
- variants: equipped with 6, 12 or 24 ST-D adapters each made of metal(SM + MM)



Data sheet

Page 2/4

OpDAT fix patch panel VIK 24xST-D (metal), SM+MM, gray

P/N

150250D124-E

EAN 4250184126881

2017-20-12

Technical Data

General Data

Fields of application

	Office
	Data center
Design	patch panel
Mounting style	1RU
Transmission technology	Fiber optic
Port numbering	yes
Color	metallike
Dimensions	
Dimension (L x W x H)	242.50 x 482.60 x 44.45 mm
Dimension (L x W x H)	9.547 x 19.00 x 1.75 in.
Inches	19 inches
Height unit	1RU
Installation depth	243.00 mm
Mode type of the fiber	Singlemode + Multimode
Labeling option	printed numbers

Connections/interfaces

Connector technology interface 1	ST-D Couplers
Connector technology interface 2	ST-D Couplers
Number of ports interface 1	24
Number of ports interface 2	24
Number of equipped ports interface 1	24
Number of ports interface 2 equipped	24
Number of ports with dust protection interface 1	24
Number of ports with dust protection interface 2	24

Mechanical characteristics

Cut-out	SC-D, LC-Q, ST-D
Connector type	Duplex
Life - Number of mating cycles	min. 1000



Data sheet

Page 3/4

OpDAT fix patch panel VIK 24xST-D (metal), SM+MM, gray

P/N

150250D124-E

EAN 4250184126881

2017-20-12

Technical Data

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	sheet steel
Material - Sleeve	ceramic, slotted
Material - Coupler housing	metal

Approvals

RoHS	compliant
------	-----------

The product meets the following standards

Fibre optic connector interfaces	DIN EN 61754-2
----------------------------------	----------------

Classifications

ETIM 5.0	EC001130
ETIM 6.0	EC001130

Packing details

Type of packaging	1 pc(s) / box
-------------------	---------------



P | Cabling

Data sheet

OpDAT fix patch panel VIK
24xST-D (metal), SM+MM, gray

Page 4/4

P/N

150250D124-E

EAN 4250184126881

2017-20-12

Illustrations

Dimensional drawing

