

## BAB 10-16 1-way tap | 16 dB | 5...1006 MHz

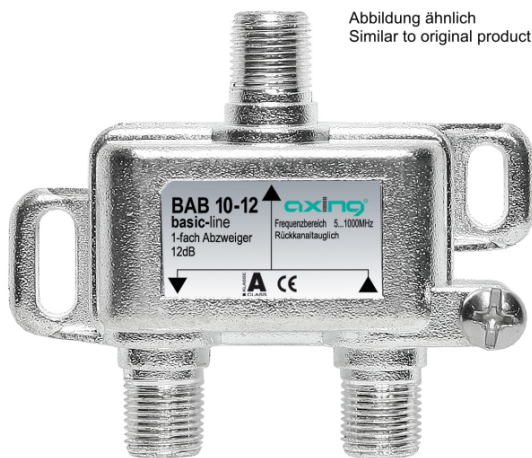


Abbildung ähnlich  
Similar to original product

- ✓ High return loss
- ✓ For multimedia-use
- ✓ Inputs and outputs hum-suppressed

### Order information

|                          |               |
|--------------------------|---------------|
| Type                     | BAB 10-16     |
| Order no.                | BAB01016      |
| GTIN                     | 7611682000993 |
| PE                       | 1             |
| VE                       | 1             |
| EU customs tariff number | 85291080      |



### Technical data

|                                     |                 |
|-------------------------------------|-----------------|
| Screening factor acc. to EN 50083-2 | > 90 dB         |
| Frequency range                     | 5...1006 MHz    |
| Tap loss                            | 16 ± 1 dB       |
| Through loss                        |                 |
| 5...40 MHz                          | ≤ 0.8 dB        |
| 40...470 MHz                        | ≤ 1.0 dB        |
| 470...862 MHz                       | ≤ 1.0 dB        |
| 862...1006 MHz                      | ≤ 1.2 dB        |
| Connectors                          |                 |
| Connector type                      | F               |
| Return loss                         | ≥ 20 dB         |
| General                             |                 |
| Dimensions (W × H × D) appr.        | 42 × 52 × 17 mm |
| Weight                              | 0.058 kg        |