

## Data sheet


**OpDAT fix patch panel splice**  
**24xLC-D (violet), OM4, gray**

Page 1/5


P/N  
**1502577524-E**  
 EAN 4250184172314

2018-13-03

## Illustrations

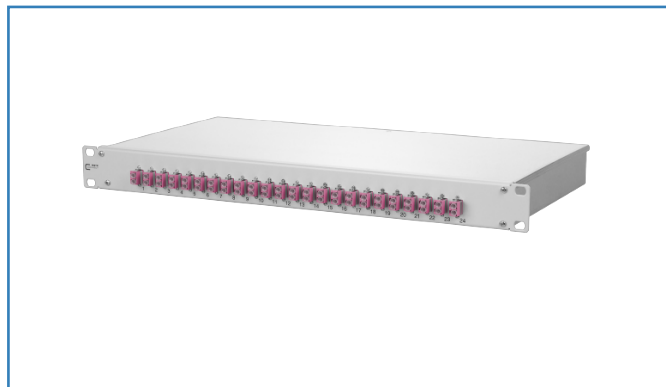

Dimensional drawing

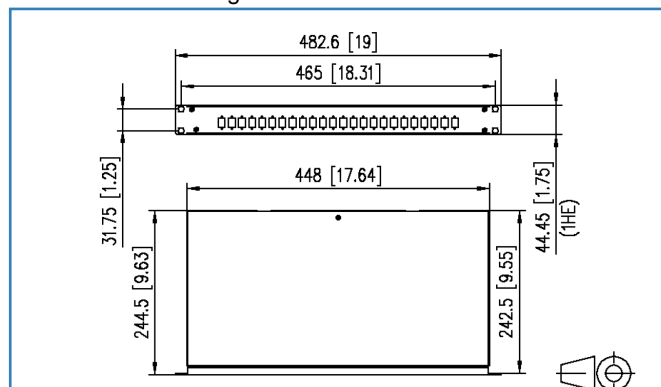

See enlarged drawings at the end of document

## Product specification

- 19 inch 1RU fiber optic patch panel for fixed installation
- equipped with LC-D adapters and LC pigtails
- pigtails with semi-tight buffered fiber dia. 0.9 mm, 12 colors, secondary and primary coating in the same color, length 2.0 m
- pigtails inserted and stripped in standard splice trays with crimp splice holders
- pigtails are cleaned and plugged in adapters
- light aluminum construction with steel sheet front plate painted (gray or black)
- unused cutouts are closed by blank plugs
- removable front plate for easy adapter mounting
- screwed on cover for easy access during service work
- several possibilities for cable entry on the back (fastening with PG13.5, PG16 and PG21 or M20 and M25)
- supplied with one PG16 cable gland
- Variants: equipped with 6, 12 or 24 LC-D adapters and pigtails, all blue (OS2), lime green (OM5), violet (OM4), aqua (OM3) or 6, 12 or 24 LC-D APC adapters and pigtails, all green (OS2)



## Data sheet

### OpDAT fix patch panel splice 24xLC-D (violet), OM4, gray

Page 2/5

P/N

1502577524-E

EAN 4250184172314

2018-13-03

## Technical Data

### General Data

Fields of application	Structured building cabling, Office Data center
Design	patch panel
Mounting style	1RU
Transmission technology	Fiber optic
Port numbering	yes
Color	violet
Dimensions	
Dimension (L x W x H)	244.50 x 482.60 x 44.45 mm
Dimension (L x W x H)	9.626 x 19.00 x 1.75 in.
Inches	19 inches
Height unit	1RU
Number of cables/ cores	48
Cable Type	pigtail(s)
Fiber class	OM4: ISO/IEC 11801/EN 50173 & IEC 60793-2-10/EN 60793-2-10 A1.a.3
Mode type of the fiber	Multimode
Fiber construction	50/125 µm
Labeling option	printed numbers

### Connections/interfaces

Connector technology interface 1	LC-D Couplers
Connector technology interface 2	LC-D Couplers
Number of ports interface 1	24
Number of ports interface 2	24
Number of equipped ports interface 1	24
Number of equipped ports interface 2	24
Number of ports with dust protection interface 2	24
Semi-tight buffered fiber pigtail length	2.00 m
Semi-tight buffered fiber pigtail length	6.56 ft
Semi-tight buffered fiber pigtail diameter	0.90 mm
Semi-tight buffered fiber pigtail diameter	0.035 in.
Cable access/outlet	several possibilities for cable entry on the back



## Data sheet

Page 3/5

## OpDAT fix patch panel splice 24xLC-D (violet), OM4, gray

P/N

1502577524-E

EAN 4250184172314

2018-13-03

### Technical Data

#### Optical characteristics

Insertion loss	max. 0.4 dB
Return loss	min. 35 dB

#### Mechanical characteristics

Cut-out	SC, LC-D, E2000
Connector type	Duplex
Life - Number of mating cycles	min. 1000
strain relief	yes

#### Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	sheet steel
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics

#### Approvals

RoHS	compliant
------	-----------

#### The product meets the following standards

Fibre optic connector interfaces	DIN EN 61754-20
Optical fibers: Product specifications	
Sectional specification for category A1 multimode fibres	ISO/IEC 60793-2-10 (A1a.3)
Optical fibers - Interconnecting devices and passive components - basic test and measuring methods	
Fibre optic interconnecting devices and passive components	IEC 61300-3-4
Fibre optic interconnecting devices and passive components	IEC 61300-3-6
Fibre optic interconnecting devices and passive components	IEC 61300-3-35
Standard colours for insulation for low-frequency cables & wires	IEC 60304



## Data sheet

Page 4/5

## OpDAT fix patch panel splice 24xLC-D (violet), OM4, gray

P/N

1502577524-E

EAN 4250184172314

2018-13-03

## Technical Data

### Classifications

ETIM 5.0	EC001130
ETIM 6.0	EC001130

### Packing details

Type of packaging	1 pc(s) / box
Packaging unit - Weight (gram)	1590.00 g
Packaging unit - Weight (pound)	3.51 lb
Packaging dimension (W x H x D)	580.00 x 405.00 x 70.00 mm
Packaging dimension (W x H x D)	22.835 x 15.945 x 2.756 in.



## Data sheet

### OpDAT fix patch panel splice 24xLC-D (violet), OM4, gray

Page 5/5

P/N

1502577524-E

EAN 4250184172314

2018-13-03

## Illustrations

### Dimensional drawing

